

CJ2 KRUHOVÝ VÁLEC MINI (nerozebíratelný) - Série lineární pohony, jednočinnné i dvojčinnné

Kód produktu: 74172



Easy fine adjustment of auto switch position


Fine adjustment of the auto switch position is possible by simply loosening the screw attached to the auto switch.


Transparent switch bracket improves visibility of indicator LED.



Head cover port location "Perpendicular to axis" is newly added to Ø 6.

Improved piping flexibility




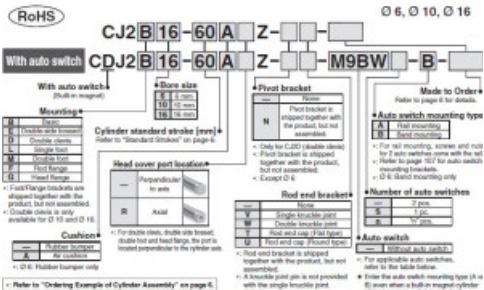

Easy fine adjustment of auto switch position
 Fine adjustment of the auto switch set position can be performed by loosening the auto switch attached screw without loosening the auto switch mounting band. Operability improved compared with the conventional auto switch set position adjustment, where the complete switch mounting band requires loosening.

Series CJ2

Series CJ2

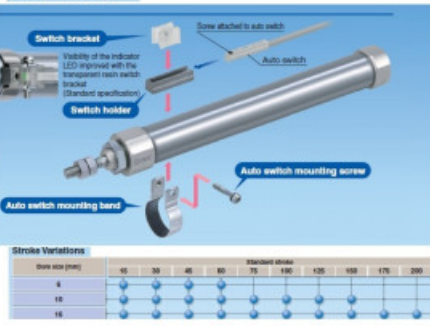

Series	Action	Type	Bore size (mm)			Stroke		Page
			6	10	16	Stroke range	Stroke	
Standard CJ2-Z	Double acting	Single rod	●	●	●	10-300	10	6
Non-sticking rod CJ2K-Z	Double acting	Double rod	●	●	●	10-300	10	23
	Single acting	Single rod	●	●	●	10-300	10	38
Bulk-mount controller CJ2Z-Z	Double acting	Double rod	●	●	●	10-300	10	47
	Single acting	Single rod	●	●	●	10-300	10	54
Direct mount CJ2K-Z	Double acting	Double rod	●	●	●	10-300	10	66
	Single acting	Single rod	●	●	●	10-300	10	73
Thread mount CJ2K-Z	Double acting	Double rod	●	●	●	10-300	10	78
	Single acting	Single rod	●	●	●	10-300	10	82
Thread mount CJ2K-Z	Double acting	Double rod	●	●	●	10-300	10	86
	Single acting	Single rod	●	●	●	10-300	10	88
With auto lock CJ2L-Z	Double acting	Double rod	●	●	●	10-300	10	93
	Single acting	Single rod	●	●	●	10-300	10	95
Low Speed Cylinder CJ2K-Z	Double acting	Double rod	●	●	●	10-300	10	99
	Single acting	Single rod	●	●	●	10-300	10	100

Applicable Auto Switches

Special Feature	Stroke range	Wiring	DC	AC	Operating pressure	Port diameter	Stroke	Ported	Application field
Standard	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General
Non-sticking rod	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General
Thread mount	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General
Thread mount (double rod)	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General
Thread mount (single rod)	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General
With auto lock	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General
Low Speed Cylinder	10-300	2 wire	12 V	24 V	0.1-0.7 MPa	6, 10, 16	10-300	●	General

- Výrobce: **SMC**
- Pracovní teplota: **-20°C až +80°C**
- Norma výrobku: **ISO 6432, 1907/2006 REACH, 2011/65/CE RoHS, PED 2014/68/UE, ATEX 2014/34/UE, bez silikonu**
- Použití produktu: **Pneumatické pohony pro automatizaci**
- Materiál produktu: **Tělo hliník, pístnice AISI 303, korpus AISI 304**
- Materiál těsnění: **NBR**
- Médium: **Tlakový vzduch**
- Zkrácená poznámka: **Zdvih od 10 mm do 300 mm.**

Základ mezi kruhovými válci: Montáž dle vašich potřeb – 7 možností montáže válce, 4 druhy upevnění pístnice. Přesný pohyb – snížené vychýlení pístnice díky přidávanému vodivému kroužku pístu jako standard. Jemné nastavení pozice snímače polohy v držáku bez nutnosti povolení montážního páska. Základní technické informace: průměry pístu: 6, 10 a 16 mm, zdvihy až 400 mm. Vestavěný magnet (D) je volitelný. Standardně k dispozici různé typy čel válce a široká škála prvků pro montáž. TLUMENÍ: elastomerové nebo nastavitelné vzduchové tlumení. K dispozici také v provedení pro výrobu baterií.

Varianty zboží

Objednávací kód
 Hmotnost
 Série
 DN
 Provozní tlak
 Vnitřní závit
 Zdvih
 Mj
 Vaše cena bez DPH
 Sklad
 SMC-CJ2RA16-20SZ
 1,1 kg
 JR2A
 16 mm
 1,5-7 bar
 M5x0,8
 20 mm
 ks
1 216,00 Kč

Lanškroun: 0Pardubice: 0Zlín: 0Praha - Zličín: 0Praha - Letňany: 0Ostrava: 0
 SMC-CDJ2RA16-20SZ-B
 1,15 kg
 JR2A
 16 mm
 1,5-7 bar
 M5x0,8
 20 mm
 ks
1 419,00 Kč

Lanškroun: 0Pardubice: 0Zlín: 0Praha - Zličín: 0Praha - Letňany: 0Ostrava: 0