


VP517/717 - 3/2 MODUL. ELEKTRO MAG. N.C - Elektromagnetický nepřímý ovládaný 3/2 ventil


Kód produktu: 74173



VP517/717




Example of
F.R.L. unit connections

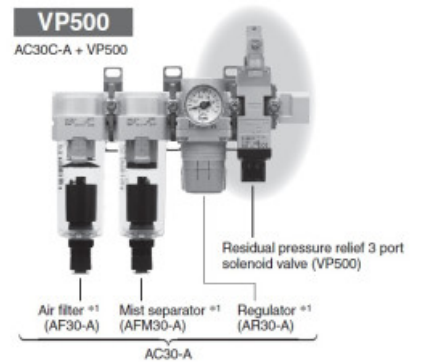

Example of F.R.L. unit connections


VP700

AW40-A + VP700



Residual pressure relief 3 port solenoid valve (VP700)

Filter regulator *1 (AW40-A) Silencer *1 (AN402-04) *1 Sold separately

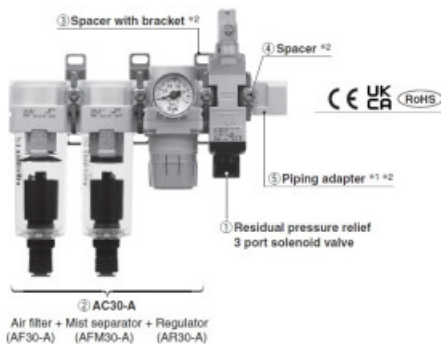

AC30-A Air filter + Mist separator + Regulator (AF30-A) (AFM30-A) (AF30-A)

Applicable Combinations/Attachment Part Nos.

| Residual pressure relief solenoid valve | Air combination | Spacer | Spacer with bracket | Piping adapter | Silencer |
|---|-----------------|--------|---------------------|----------------|----------------------|
| VP517 | AC25 AC30 | Y300-A | Y300T-A | ER0-C30-A | AN302-03 AN302-03 |
| VP17 | AC40 | Y400-A | Y400T-A | ER0-C30-A | AN402-04 AN402-04 |

* Refer to page 3 for details of the spacer.

Modular Connection Type Residual Pressure Relief 3 Port Solenoid Valve VP500/700 Series

| Fluid | Air | |
|---|---|------------|
| Type of actuation | N.C. | |
| Internal pilot | Standard | 0.2 to 0.7 |
| Operating pressure range [MPa] | Adjustment type | 0.2 to 1 |
| Ambient and fluid temperature [°C] | -10 to 50 (No freezing) | |
| Maximum operating frequency [Hz] | 5 | |
| Manual override (Manual operation) | Non-locking push type Push-locking type (Manual) Non-locking push type (Manual) | |
| Pilot exhaust method | Individual exhaust | |
| Lubrication | Not required | |
| Mounting orientation | Unrestricted | |
| Impact/Vibration resistance [m/s ²] | 150/30 | |
| Enclosure | IP66 | |

| Electrical entry | DIM terminal (D) | | |
|-------------------------------|------------------------------------|--------------------|-------------------------|
| | DN terminal (Y) <EN175301-803 (C)> | D, Y | |
| Coil rated voltage [V] | DC | 24, 12 | |
| | AC (50/60 Hz) | 100, 110, 200, 230 | |
| Allowable voltage fluctuation | ±10 % of rated voltage** | | |
| Power consumption [W] | DC | Standard | |
| | AC | Standard | |
| Apparent power [VA]** | AC | 100 V | 0.78 (With light: 0.87) |
| | | 110 V | 0.86 (With light: 0.97) |
| | | 200 V | 1.15 (With light: 1.30) |
| | | 230 V | 1.27 (With light: 1.46) |
| Surge voltage suppressor | Varistor (DC) | | |
| Indicator light | LED (DC) Neon bulb (AC) | | |

- Výrobce: **SMC**
- Médium: **Vzduch, inertní plyny**
- Pracovní teplota: **-10°C až +50°C (bez námrazy)**
- Použití produktu: **Úprava tlaku vzduchu**
- Zkrácená poznámka: **Stupeň krytí IP65.**
- Norma výrobku: **RoHS**

Elektromagnetický nepřímo ovládaný 3/2 ventil pro odvodu zbytkového tlaku, modulární provedení. Řady: VP517 /VP717. Modulární spojení s jednotkami úpravy vzduchu FRL. Jednoduché, rozměrově úsporné spojení. Příkon: 0.35 W (bez světelné signalizace) , může být trvale sepnut.

Varianty zboží

Objednávací kód

Hmotnost

Provozní tlak

Vnitřní závit

Regulace

Provedení

Napětí

Výbava

Mj

Vaše cena bez DPH

Skład

SMC-VP517KY-4YO1

0,199 kg

2 - 10 bar

G 3/8"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 207,50 Kč

Lanškroun: **0**Pardubice: **0**Zlín: **0**Praha - Zličín: **0**Praha - Letňany: **0**Ostrava: **0**

SMC-VP517KY-5DZ1

0,22 kg

2 - 10 bar

G 3/8"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 440,40 Kč

Lanškroun: **0**Pardubice: **0**Zlín: **0**Praha - Zličín: **0**Praha - Letňany: **0**Ostrava: **0**

SMC-VP517KY-5YO1

0,199 kg

2 - 10 bar

G 3/8"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 077,80 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP517Y-5DZ1

0,222 kg

2 - 7 bar

G 3/8"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 440,40 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP517Y-5YO1

0,199 kg

2 - 7 bar

G 3/8"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 077,80 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP717KY-4YZ1

0,48 kg

2 - 10 bar

G 1/2"

3149 l/min.

YO-Konektor:ANO

220V/AC

Standard

ks

3 820,00 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP717KY-5YZ1

0,48 kg

2 - 10 bar

G 1/2"

3149 l/min.

YO-Konektor:ANO

220V/AC

Standard

ks

4 012,90 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP717KY-5YO1

0,39 kg

2 - 10 bar

G 1/2"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 713,90 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP717KY-4YO1

0,48 kg

2 - 10 bar

G 1/2"

3149 l/min.

YO-Konektor:NE

220V/AC

Standard

ks

3 820,00 Kč

Lanškroun: Pardubice: Zlín: Praha - Zličín: Praha - Letňany: Ostrava:

SMC-VP717Y-5YO1

0,39 kg

2 - 7 bar
G 1/2"
3149 l/min.
YO-Konektor:NE
220V/AC
Standard
ks

3 713,90 Kč

Lanškroun: 0Pardubice: 0Zlín: 0Praha - Zličín: 0Praha - Letňany: 0Ostrava: 0